


## ASSEMBLY INSTRUCTIONS

### Issa 26" Picture Light

Item # ARN2358

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

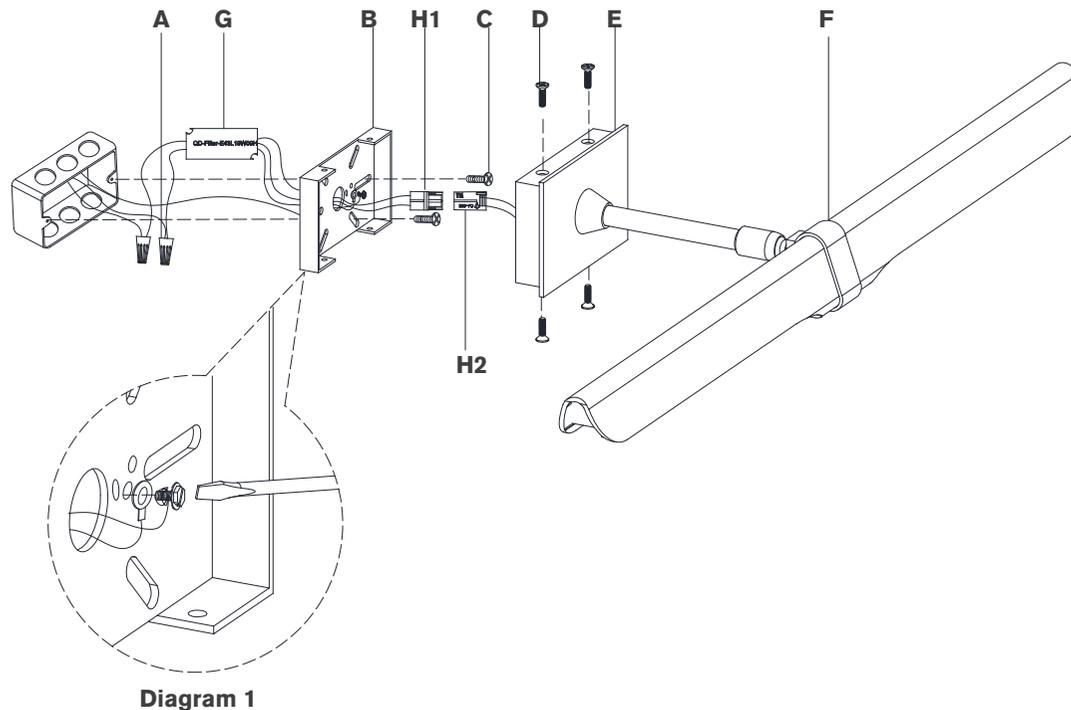

#### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (B) from fixture (E) by removing screws (D).
3. Connect filter (G) neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
4. Connect filter (G) hot wire (black) to the supply hot wire (usually black) using wire nut (A).
- CAUTION:** Do not reverse the hot and neutral connections.
5. Make sure all wire connections are tight, then carefully tuck filter (G) into the junction box and route quick connector (H1) and filter ground wire through center of mounting plate (B).
6. Install mounting plate (B) to the junction box and secure with mounting screws (C).
7. Remove green grounding screw from mounting plate (B). Install filter ground wire to mounting plate and secure with grounding screw, then wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
- NOTE:** It is imperative that the fixture is grounded.
8. Connect quick connectors (H1 & H2) together.
9. Install fixture (E) to mounting plate (B) and secure with screws (D).
10. Adjust shade (F) to desired position.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.